

# Saatvik Inverters WiFi Setting

- First Download the App SAATVIK SOLAR INVERTERS From Google Playstore/ Appstore .




**SAATVIK SOLAR INVERTERS**

Version: 1.0.0

- Account Creation:


Click On NO  
ACCOUNT

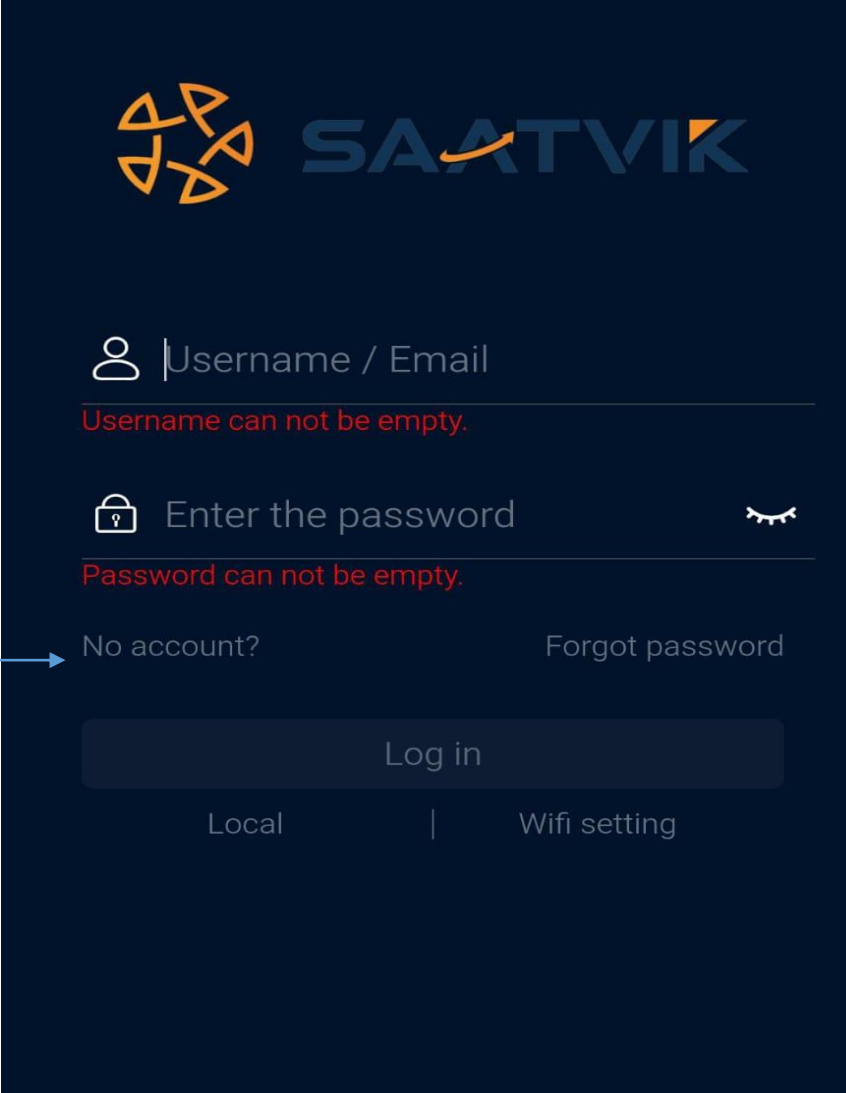

The screenshot shows the SAATVIK login interface. At the top left is the SAATVIK logo, consisting of a circular arrangement of orange triangles and the text "SAATVIK" in blue. Below the logo are two input fields. The first field is labeled "Username / Email" and has a red error message below it: "Username can not be empty." The second field is labeled "Enter the password" and has a red error message below it: "Password can not be empty." To the right of the password field is a visibility toggle icon. Below the input fields are two links: "No account?" and "Forgot password". At the bottom is a "Log in" button. Below the button are the options "Local" and "Wifi setting".

- Create Account Using End User's Username and End User Email Address:


End User E-mail Address

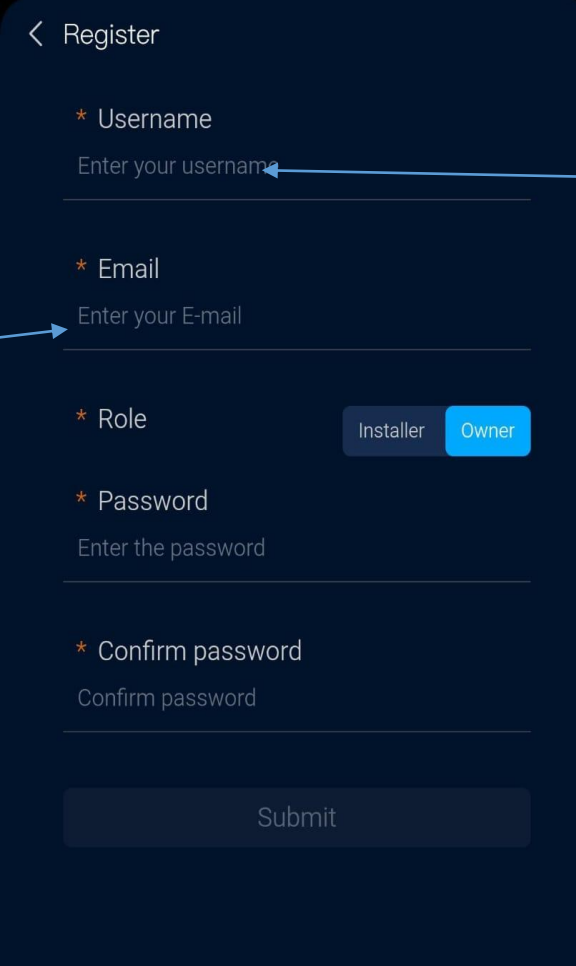

A screenshot of a mobile application's registration screen. The screen has a dark blue background and contains the following fields and elements from top to bottom: a back arrow and the title 'Register'; a 'Username' field with a red asterisk and the placeholder text 'Enter your username'; an 'Email' field with a red asterisk and the placeholder text 'Enter your E-mail'; a 'Role' field with two radio buttons labeled 'Installer' and 'Owner', where 'Owner' is selected; a 'Password' field with a red asterisk and the placeholder text 'Enter the password'; a 'Confirm password' field with a red asterisk and the placeholder text 'Confirm password'; and a 'Submit' button at the bottom.


End User Username

- Login Using End User's Username & Password

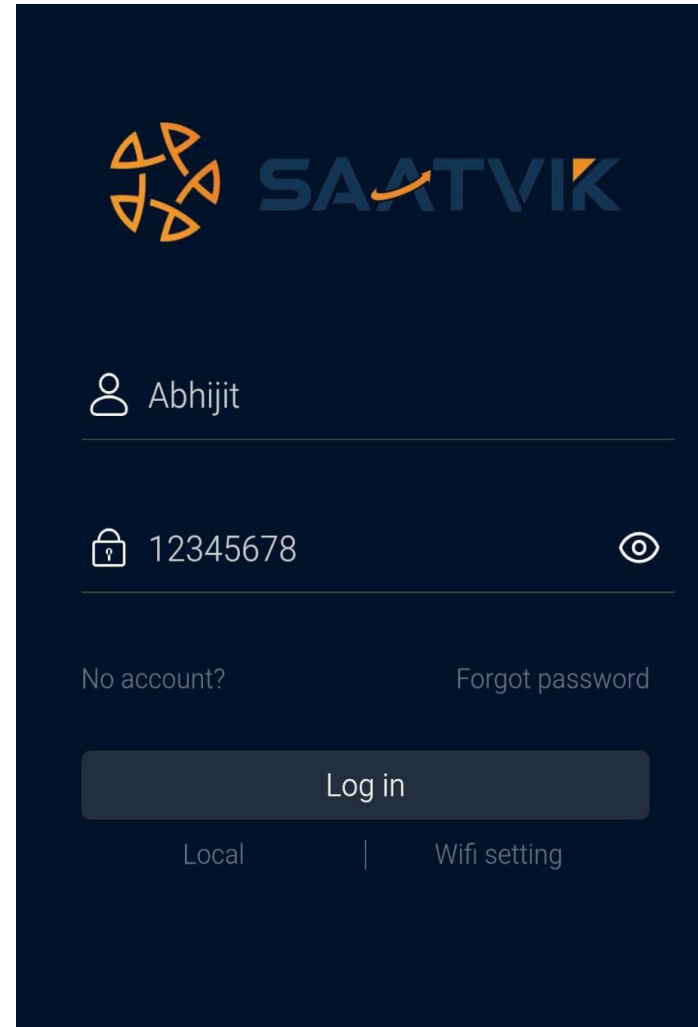

The screenshot shows a dark-themed login screen for SAATVIK. At the top left is the SAATVIK logo, consisting of an orange circular icon with four triangles and the text "SAATVIK" in blue. Below the logo, there is a username field with a person icon and the text "Abhijit". Underneath is a password field with a lock icon, the text "12345678", and an eye icon to toggle visibility. Below the password field are two links: "No account?" and "Forgot password". A large, dark "Log in" button is centered below these links. At the bottom, there are two options: "Local" and "Wifi setting", separated by a vertical line.

- Create Plant:

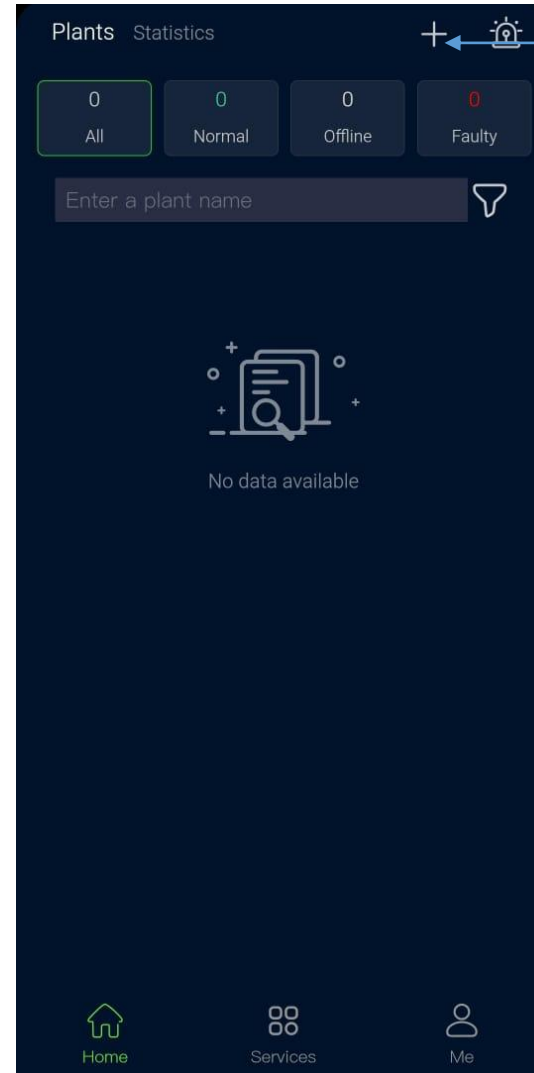

Click On + Sign And Fill the Plant Information



**SAATVIK**  
FOR A BETTER FUTURE

- Add Station:

< Add station

\* Plant name

\* Installer

\* End user  
Abhijit

\* System size(kW)

**SAATVIK SOLAR INVERTERS**  
Please turn on GPS, and we can get the location of the station by GPS

OK

\* Energy rate

\* Time Zone  
Chennai,Kolkata,Mumbai,New Delhi(5.50)

\* Longitude(-180~180)

\* Latitude(-90~90)

Give Access to  
Location of Plant

- Fill the Plant Details:

< Add station

\* Plant name  
Test Plant

\* Installer  
Saatvik

\* End user  
Abhijit

\* System size(kW)  
6

\* Installation date  
2025-09-19

\* Plant type  
On-grid system

\* Energy rate  
10 Rs


\* Time Zone  
Chennai,Kolkata,Mumbai,New Delhi(5.50)

\* Longitude(-180~180)  
77.23040323374475


\* Latitude(-90~90)



- Click On Plant Name:

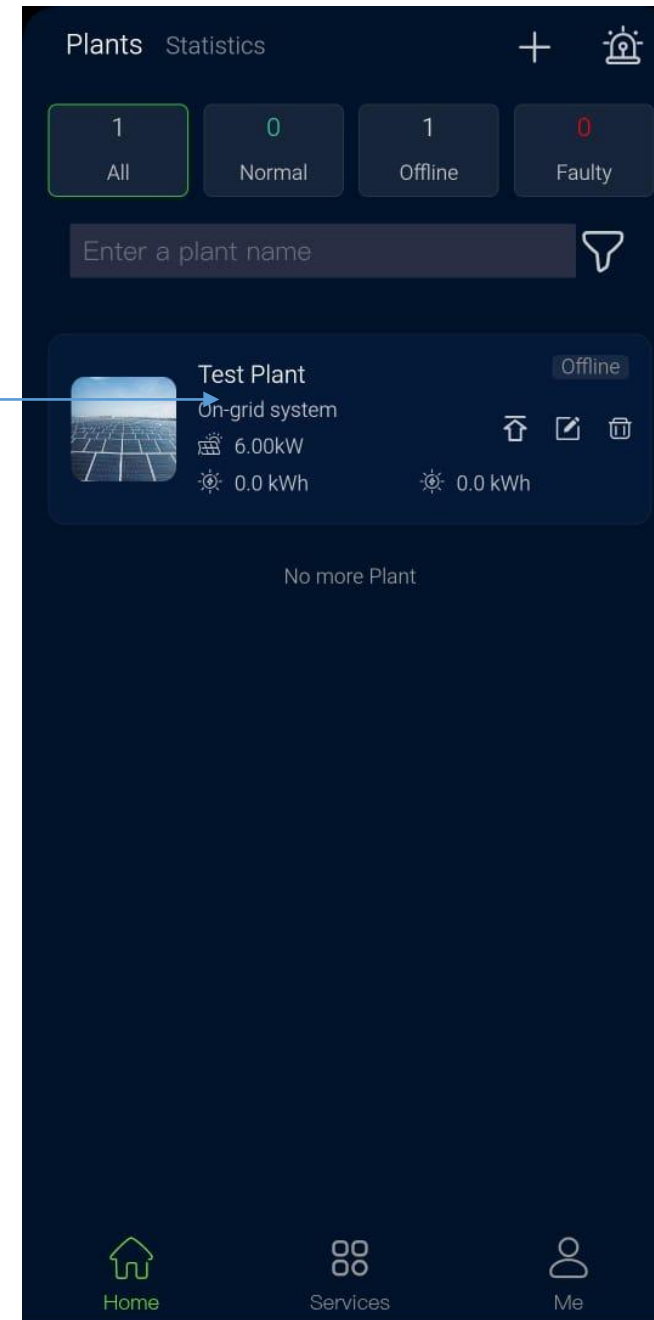

- Add Device:

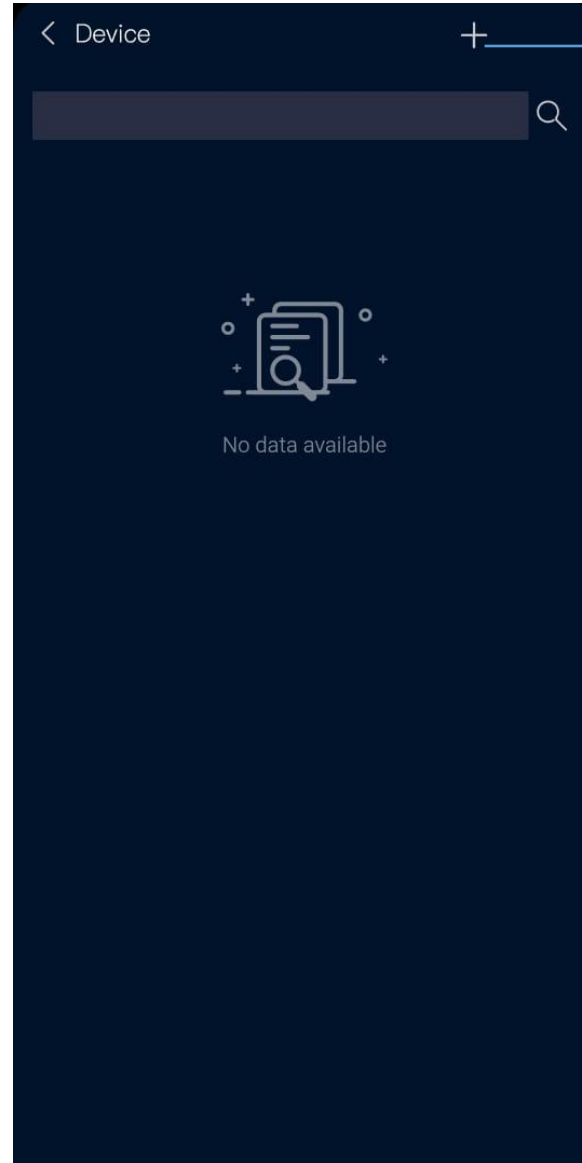


Click On + PLUS Sign  
to Add Inverter/  
Device



**SAATVIK**  
FOR A BETTER FUTURE


# Enter Serial Number Of Inverter:

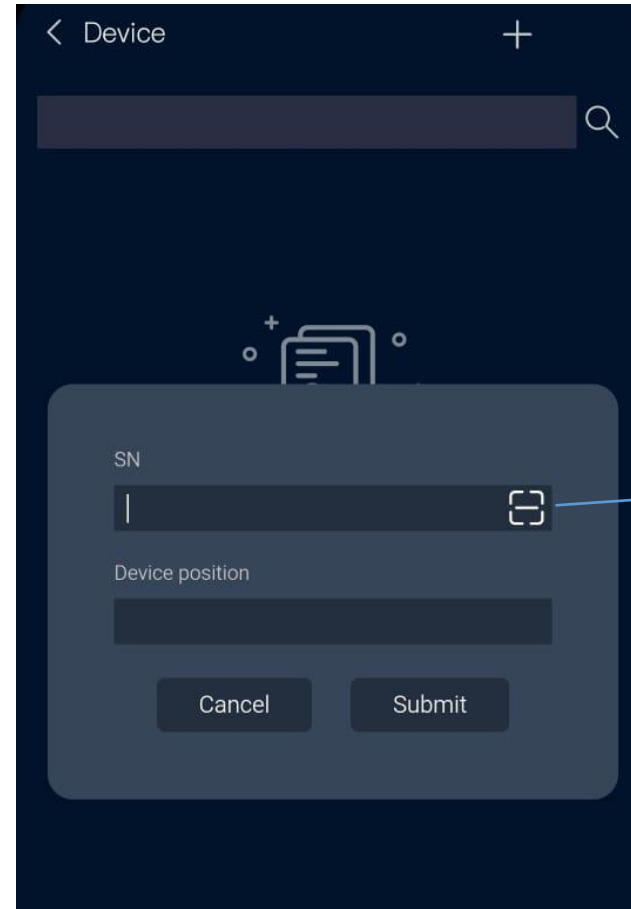

The screenshot shows a mobile application interface with a dark blue background. At the top, there is a header with a back arrow, the text "Device", and a plus sign. Below the header is a search bar with a magnifying glass icon. In the center, there is a white icon representing a device with a plus sign. A modal dialog box is open in the foreground, containing two input fields: "SN" and "Device position". The "SN" field has a cursor and a QR code icon to its right. Below the input fields are two buttons: "Cancel" and "Submit".

Enter Serial Number of Inverter Manually Or Scan Serial Number by Mobile

# Wifi Configuration:

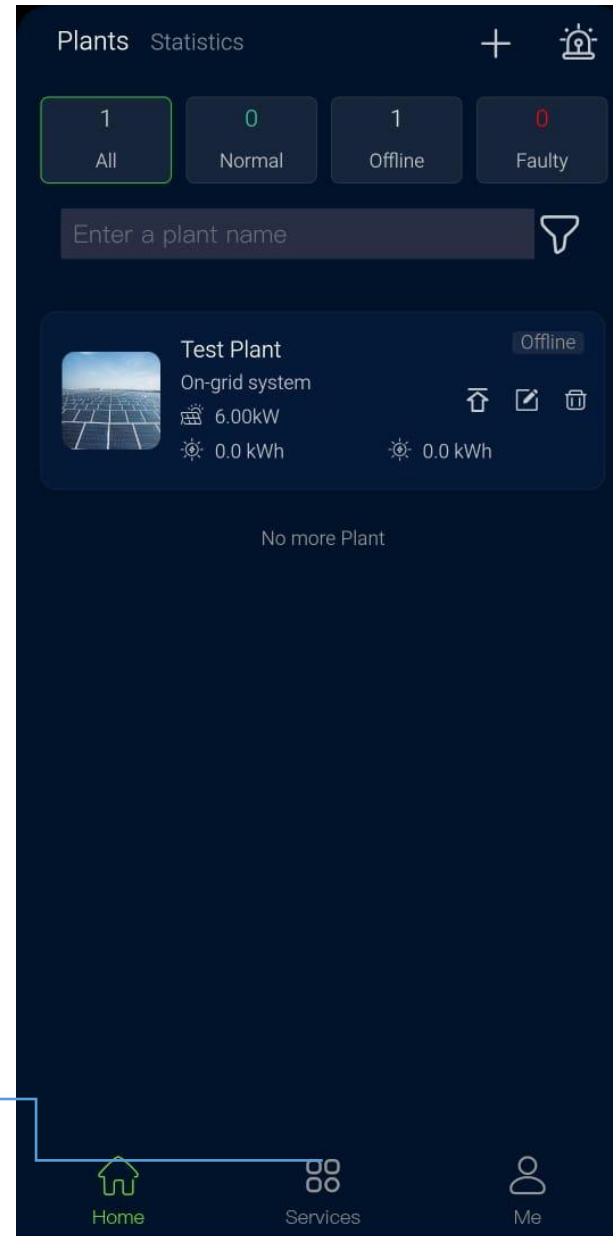


Click On Services

Click On Wifi- G2



- Turn On BLUETOOTH:

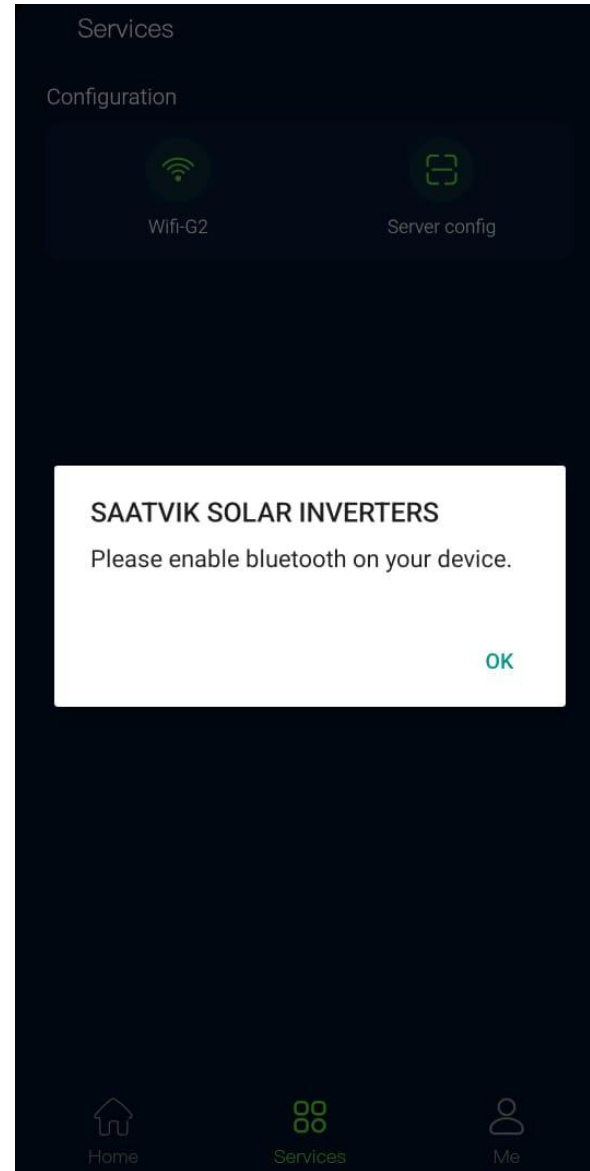

- Connect Mobile to the Home Wifi Router.  
In SSID Home Router Name appeared

Wifi Setting

Applicable only to 2.4GHz WLAN. Please press datalogger's button for 1-2 seconds, Datalogger will flash green light.

SSID:

Password:

BLE Name: Solar

START BACK

Enter Home wifi  
Router Name


Enter Home Router  
WiFi Password

Click On START  
Button



After Successful Configuration, Linked Module Message will be Shown.

Inverter WIFI STICK showing Constant GREEN LED

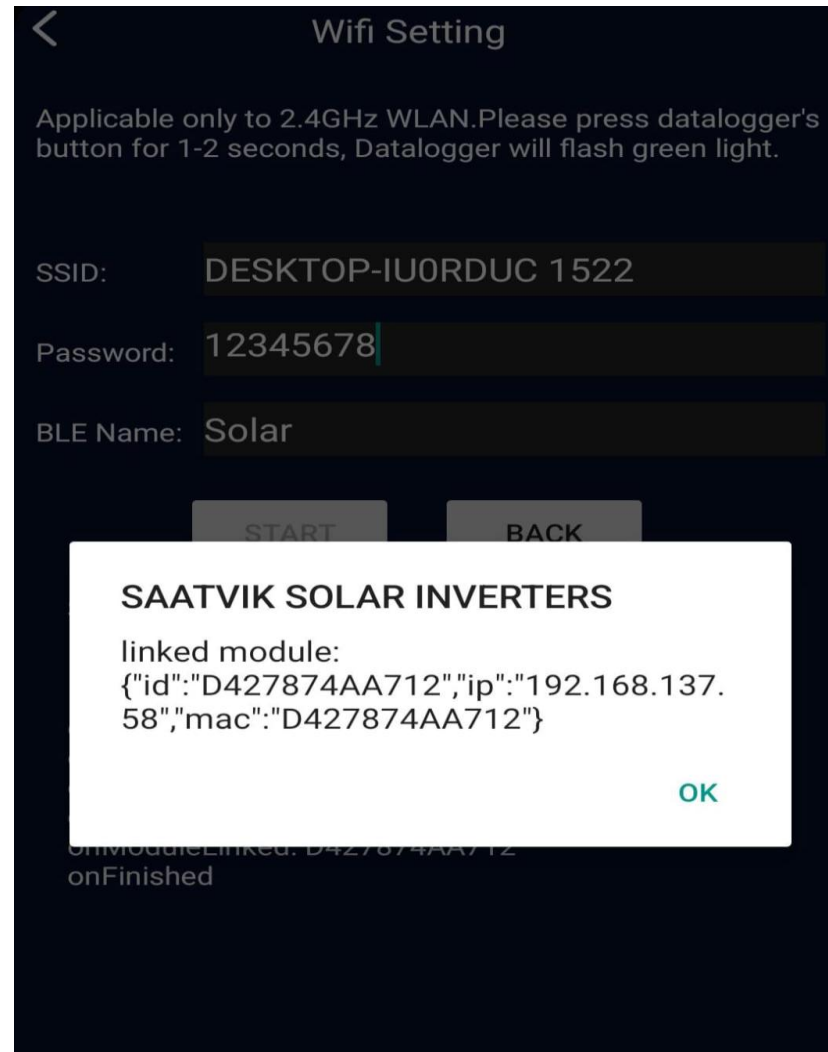

# Thank You



**SAATVIK**  
FOR A BETTER FUTURE



**SAATVIK**  
FOR A BETTER FUTURE